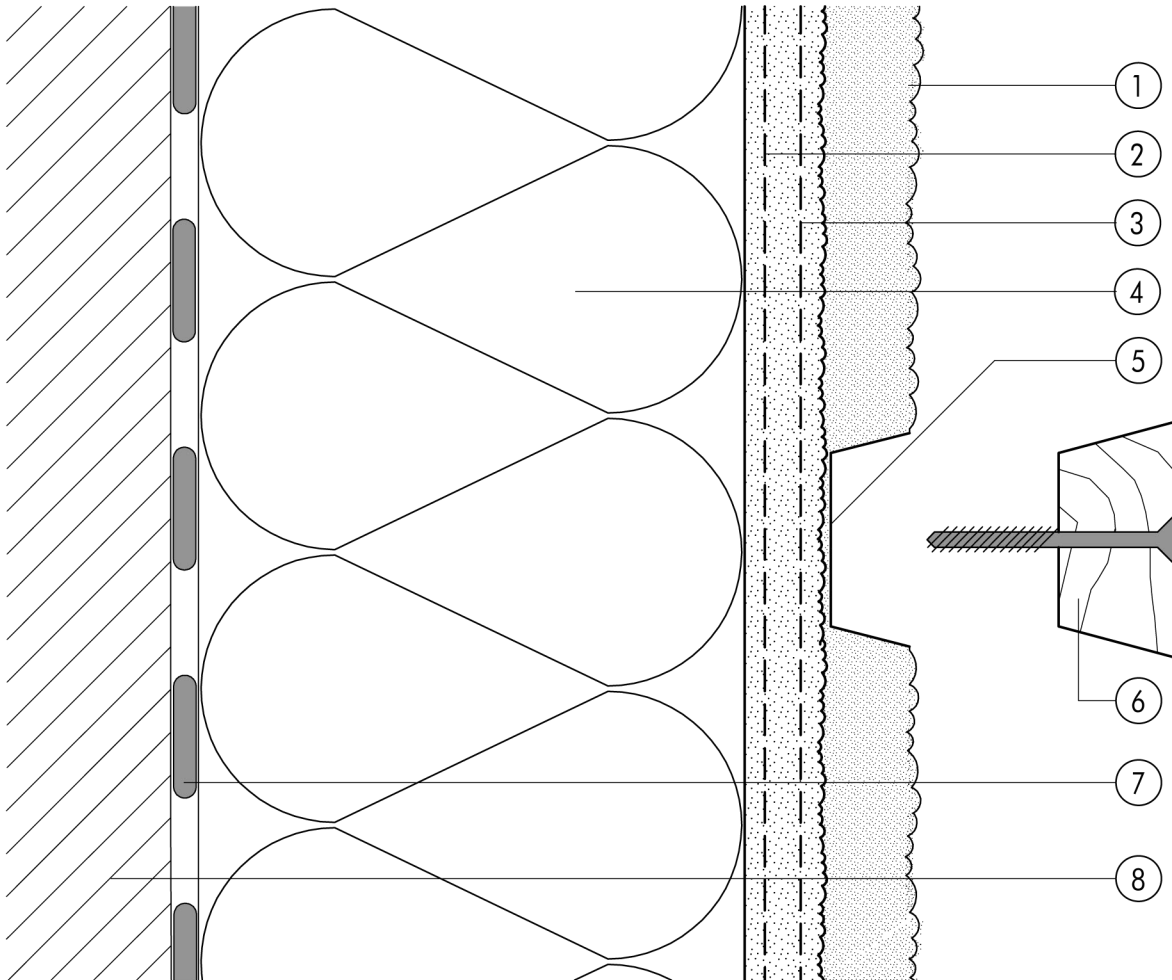


1.9 Miscellaneous

**1.9.04 Imitation ashlar render with trapezoidal fillet**


- ① Finish render, where necessary with paint coating or impregnation (presto der Schnelle, 2 mm max 3, surface scratched, max. 10 mm)
- ② First reinforcing layer
- ③ Second reinforcing coat (alternatively, double scrim layer)
- ④ Insulation (STYROPOR®, MINERAL FIBRE)

- ⑤ Ashlar joint
- ⑥ Trapezoidal softwood fillet (with steel nail or screw and plug)
- ⑦ Bonding mortar (SM700, Lustro)
- ⑧ Masonry