


2.1 Standard assemblies

2.1.06 Timber studwork directly faced with DIFFUTHERM

2.1

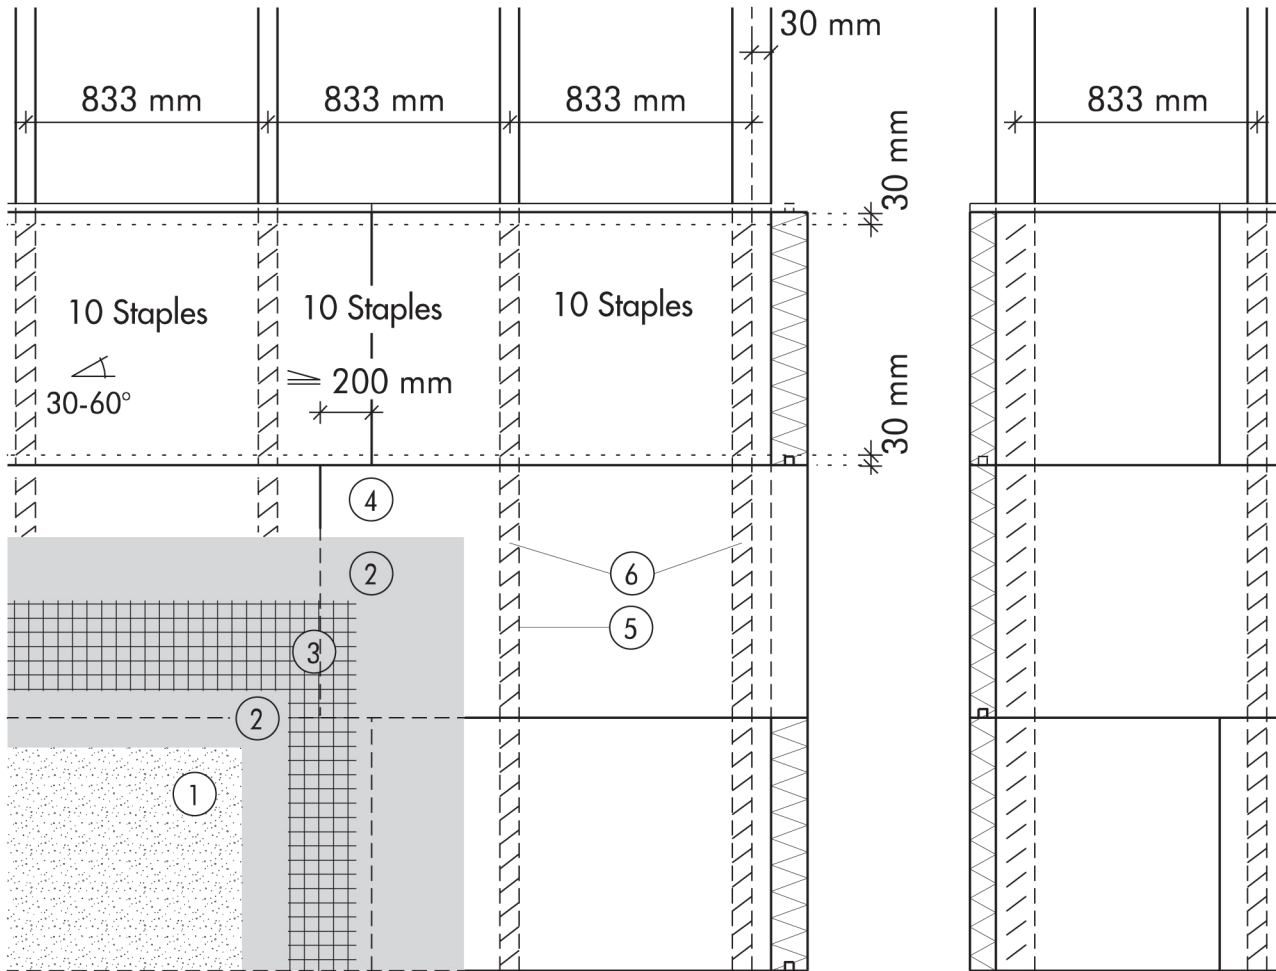

Assembly directly on site
Effective cover 1290 mm x 780 mm

Prefabrication in plant

- | | |
|--|---|
| <ul style="list-style-type: none"> ① Finish render, where necessary with paint coating or impregnation (e.g. NOBLO, SP 260, conni S) ② Reinforcing mortar (SM700) ③ Scrim with 10 cm lap at joints (MARMORIT scrim) | <ul style="list-style-type: none"> ④ DIFFUTHERM insulation board board thickness 80, 100 mm ⑤ Timber studwork, 833 mm centres ⑥ 27 mm stainless steel wide-crown staples, 1.8 mm dia, to DIN 1052-2, pointside penetration \geq 30 mm |
|--|---|